

NICOLOCK

"Stones of Distinction"

ARMOR-CON
Formulation Technology

Full Color • Full Strength • Full Penetration

PALUMBO
BLOCK CO., INC.
CONCRETE BLOCK AND MASON SUPPLIES

800-724-8460

info@palumbo.biz

www.palumbo.biz

Let
NICOLOCK
Pave Your Way



Full Color • Full Strength • Full Penetration



Cross Section of **NICOLOCK**'s ARMOR-CON™ Paving Stone

Technologically superior paving stone **provides up to 6 TIMES** more penetration color and strength throughout the entire thickness of the paver.

OTHER BRANDS

Concrete veneered "Surface Coated"



Cross Section of Other Brands Paving Stone

Only **provides up to 3/8"** of concrete Veneered coating with limited penetration of color and strength in the remaining thickness of the paver.



Top view of **NICOLOCK**'s ARMOR-CON™ Paving Stone

Paving stones with Armor-Con™ by **NICOLOCK** are **Guaranteed to Prevent** delamination and deterioration under the severest weather conditions.

Concrete Veneered / "Surface Coated" paving stones increase the potential for delamination and deterioration under normal and severe weather conditions.



Top view of Other Brands Paving Stone

Compare the Difference

	Full Color	Full Strength	Full thickness
NICOLOCK	Yes	Yes	Yes
Other Brands	No	No	No

Holland

Holland Stone pavers are traditional in size and shape and can be installed in a variety of patterns, adding simple elegance to all landscape settings.



Give true definition to the walkway of your home with a 45° herringbone pattern in Autumn Blend.



4" x 8"



Enjoy your leisure hours around your pool. Choose from a variety of **NICOLOCK** pastel colors and blends to enhance your poolscape setting.

FYI: NICOLOCK exclusive pastel colors and blends keep your paved area cooler. No need to get "hot feet" when relaxing on your pool deck or patio.

Cobblestone

Often referred to as the “Stop Sign” or “Lollipop” shape, Cobblestone adds attractive simplicity to driveways, pool decks, patios or walkways. Popular with traditional to modern architectural styles. The edge stone is used to minimize cutting along perimeter edges.



Bayberry Blend with Charcoal Fullnose coping.



Fire Island Blend with Holland Stone Charcoal feature strips.



Full Stone



Edger

Cobblestone is a one piece unit incorporating a true octagon with a square. Installed in any one of several patterns, the Cobblestone look is striking but not distracting.



Autumn Blend with Bullnose Coping further enhanced with **NICOLock** Firma Retaining Wall System.

Rustico

Rustico features a subtle, undulating face texture that changes appearance as the sun moves. Available in two easy to work with sizes, Rustico makes exciting pattern designs simple to achieve.



Modified Herringbone pattern utilizing 6 x 6 and 6 x 9



Herringbone pattern with 6 x 9 Rustico



3" x 6"



6" x 6"



6" x 9"

FYI: Installing **NICOLock** Paving Stones around swimming pools makes troublesome underground piping repairs easier and less expensive without creating unsightly blemishes.



Roma® Series

The “pillowed” edges and turned down corners create a European cobble effect adding Old World beauty and charm to any paving application. Roma® I is rectangular in shape and can be used by itself or in pattern designs with Roma II or Sante®-Euro Circle.



Fire Island Blend

Roma® I



4 3/4" x 7 3/16"

The color, pattern and value-added aesthetics of this driveway could not be duplicated with most other paving material alternatives. Installed in a running bond with soldier course borders in sweeping curve design accented with a Sante®-Euro Circle.

Sante®-Euro Circle



Terra Cotta Blend

Full circles, half circles, circles within circles, fans, sweeping curves - all possible with the Sante®-Euro Circle units. Circle patterns can be used with most any shape paver to add classic elegance to your installation.

Roma II & Sante®- Euro Circle

Roma® II features a square stone packaged with what is termed a “twinkie”. Using the two pieces allows unlimited flexibility in linear or free form patterns. Roma® II has the same edge and corner design as Roma® I and Sante®- Euro Circle to permit even more design flexibility.




Crab Orchard Blend

Add circle patterns to your driveway apron to create a “private road” to your home.



Marble Blend

Roma® II



4 3/4" x 4 3/4"



2 3/8" x 4 3/4"

A driveway with **NICOLOCK** pavers is transformed into a multi-functional, individualized element of your landscape design.

Sante®-Euro Circle



Circles scalloped with perimeter fans.

FYI: No need to worry if you damage a paving stone after installation. A damaged piece can be pried out with two flat head screwdrivers and a new paver can be installed. (See installation details.)

Tumble Stone

NICOLOCK Tumbled Stone pavers evoke the texture and unevenness of natural stone pavements. Tumbled pavers are available in a number of shapes and a variety of colors. Different sizes can be installed alone or in combination with other sizes and/or colors.



Marble Blend

The warmth and charm of Holland Tumbled Stone gives the appearance of vintage brick.



Crab Orchard Blend

Holland Stone 4 x 8



Double Holland 8 x 8



Tumble Stone


Whether it be a pool deck, patio, entrance way or driveway, **NICOLOCK** Tumble Stone will enhance the landscape of your home with the look of old stone in harmony with gardens, yards and patios of today.



Rustico



6" x 6"



3" x 6"



6" x 9"



Tumble Stone in Marble Blend

FYI: **NICOLOCK** Tumble Stone have beveled edges on one face and straight edges on the other face. Install Tumble Stone with beveled face up or straight edge face up. A third option is to randomly mix the units throughout the installation.

New England Classic

TUMBLLED

Series

The Village Paver and The Country Paver



The **Village Paver** contains a combination of 5 distinctly different shapes in each bundle for a rustic natural stone look. The **Village Paver** is available **tumbled** or **untumbled**.

The **Country Paver** is a non chamfered paver consisting of 4 sizes designed for random pattern installation. The modular sizes allow for many installation styles.



Village Paver



2.4" x 4.8"



4.8" x 4.8"




4.8" x 7.3"

Country Paver




3" x 6"




6" x 6"




6" x 6"



9" x 9"



4.8" x 9.7"



7.3" x 9.7"



Sizes not sold separately



Sizes not sold separately

New England Classic

TUMBLLED


Series

Colonial Cobble

Consisting of four shapes plus a circle kit, Colonial Cobble challenges the imagination. The textured face and pressed corners of Colonial Cobble gives the look of Old European cobblestones. Colonial Cobble is also available Untumbled.



1-1/2 Normal
6 5/16" x 9 3/8"



Normal
6 5/16" x 6 5/16"



3/4 Normal
4 3/4" x 6 5/16"



1/2 Normal
3 1/8" x 6 5/16"



New England Classic


TUMBLLED

Series

Colonial Cobble



Combine the various sizes of **Colonial Cobble** with the **Colonial Cobble Circle**.

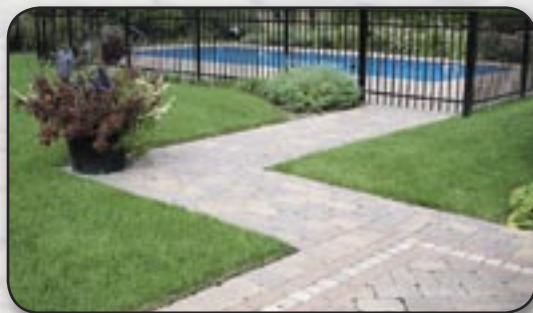


New England Classic


TUMBLLED

Series

Tuscany is versatile. From free form design for rigorous alignment of straight applications, Tuscany Pavers offer bold character to your landscape.

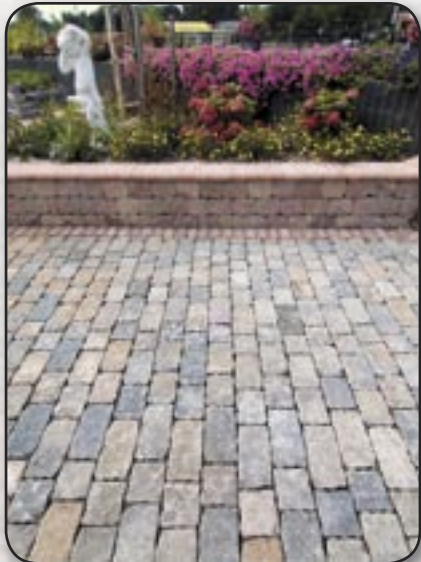

Truly rustic in appearance, **Tuscany Paver** is also available Untumbled.



5.5" x 7.8"



5.5" x 9.4"



5.5" x 6.7"



5.5" x 4.6"



Utility



Fullnose
3 7/8" x 7 13/16"

Bullnose or Fullnose units add the finishing touch to a planter wall and steps in matching or contrasting colors.

Pool coping stone is a reversible utility used as a pool coping, step tread or wall coping.

Pool Coping



4" x 10"




Bullnose
3 1/2" x 7 13/16"

The non-slip textured surface and excellent abrasion resistance of **NICOLOCK** utility units will provide long lasting durability and beauty. The perfect trim for your paving installation.



Fullnose
8" x 12"



Fullnose
4" x 12"



8 x 12 Fullnose unit makes an ideal stair tread in contrasting color.

Installation Guidelines



1 Determine the area to be paved. Measure for square footage and sketch a diagram of the shape and pattern of paving stone desired.



2 Before beginning excavation, make sure there are no utility lines within the area to be paved. Excavate area to the proper depth depending on the type of traffic. Refer to cross section diagram.



3 Establish the finish grade and slope or pitch of pavement to allow for drainage. Layout the lines and corners with string line and stakes. Compact sub-base with mechanical compactor.



4 Spread aggregate base uniformly throughout the entire excavated area and 8 in. beyond perimeter lines. Base aggregate material should be processed 1/2" gravel or crushed concrete blend.



5 Compact the base aggregate evenly throughout the area with mechanical plate compactor. Do not compact the base aggregate in more than 6" layers. The compacted base should conform to the contour of the finished paved area. The grade of the base aggregate should be 3" to 4" below



6 Install edge restraints as required. Pavers butting against curbs or foundations will not need an edge restraint. Various types of edging materials can be used. **NICOLock** recommends the use of a plastic edge restraint since it is easy to install and will not rot or decay.



7 Spread 1" to 1 1/2" of concrete sand evenly over the compacted base. Scream the bedding sand to a level, smooth surface using a screed board. For areas wider than the width of the screed board, use 1 1/2" conduit pipe as screed guides at 4' spacing. Do not disturb sand bed after it has been screeded.



8 Begin placing paving stones on the screeded sand bed in the desired pattern. Place the paving stones with a hand tight joint. Work from the paving stone side of the installation as they are set. To achieve the best mixture of colors and blends, remove pavers from delivered bundles section by section, not layer by layer and work from several bundles at a time.

9 When all pavers are placed, sweep surface clean. Spread a fine jointing sand over the entire surface and broom sweep to fill all joints. Leaving excess sand on the paving stone surface, tamp the paving stones into the setting bed with the mechanical plate compactor. Broom sweep more sand to fill any open joints. Your installation is complete and ready for use.




Tools and Equipment Required

- Gloves
- Tape Measure
- Wood Stakes
- Shovel
- 3 lb. Hammer
- Carpenters Level
- Line Level
- 24" Carpenters Square
- String Line
- 2 Lg. Screwdrivers
- Broom
- Garden Rake
- Wheel Barrow
- Pick (if ground is hard)
- Marking Crayon
- 2 pcs. 1 1/2" o.d. conduit pipe x 8' long (screed pipe)
- 1 pc 2" x 4" x 8' kiln dried lumber (screed board)

Installation Guidelines

CROSS SECTION OF A TYPICAL INSTALLATION

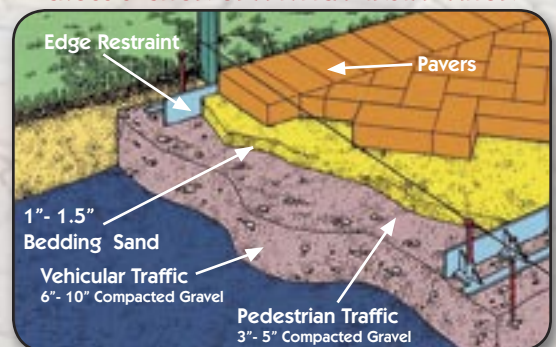

In addition, you will need a plate compactor and guillotine cutter or a masonry saw. Your dealer can assist you in obtaining the necessary materials and equipment needed to complete your paving stone installation.

Standard Colors & Blends



*Bayberry Blend



Charcoal




Brown



*Crab Orchard Blend



Pewter



Salmon




*Marble Blend



Granite City




Terra Cotta



Chamois




Red




*Mojave Tan



Golden Brown




Fire Island



*Sage Blend



Harvest Gold



*Autumn Blend



Adobe Blend

About Color


- The color illustrations in this catalog are as accurate as photography and printing processes allow. Final selection of colors should be made from several physical samples.
- Shade variations are inherent in colored concrete products using natural materials. Delivered product can vary slightly from physical samples. When installing colored concrete products, units should be blended by selecting vertical stacks from several bundles.
- **NICOLOCK** paving stones are produced with our exclusive Armor-Con™ process utilizing the highest quality color pigments and raw materials available. This process ensures that each paving stone is thoroughly saturated with formulated aggregates and color pigment throughout the full thickness of the paver, not just a surface coating.
- All **NICOLOCK** products are produced in accordance with industry accepted standards and applicable specification requirements.

Lifetime Guarantee

NICOLOCK Paving Stones provides a lifetime warranty to the original purchaser on the structural integrity of its paving stone used in residential applications. Material installed using our guidelines that prove defective, will be replaced without cost. Replacement of material proven to be defective will be limited to the value of the material to be replaced. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required and other exclusions apply. Please ask for details.

*Premium Color

Standard Colors & Blends



*Oyster Blend

About Efflorescence

Efflorescence is a whitish, powder like deposit that may sometimes appear on the surface of the paving stones. It may appear immediately or within a short time after installation. Left alone, normal wear and exposure to the elements will dissipate the efflorescence.

Efflorescence is a normal occurrence in all cement based products, as well as many color paving products. Because it is a natural reaction to the proper hydration of concrete, **NICOLOCK** accepts no responsibility or liability for replacement.

If there is a need to remove the efflorescence before it naturally wears away, best results are obtained by using a proprietary efflorescence remover which is available from most mason supply dealers. **Do not use muriatic acid.**

If a sealer is to be applied to the paving stones, it is recommended that any presence of efflorescence be removed prior to sealer being applied.

The use of a concrete base, a cementitious setting bed or mortared joints may increase the chance of efflorescence occurring.

3 color blends are not recommended for projects less than 500 sq. ft. (Bayberry, Crab Orchard, and Autumn Blend)

*Premium Color



DISTRIBUTED BY

NICOLOCK

PALUMBO

BLOCK CO., INC.

CONCRETE BLOCK AND MASON SUPPLIES